

Angle/Base Flashing

DESIGN FEATURES

Efficient wall to roof application. Protects against leaks at walls and chimneys to roof connections.








MATERIAL

Primed: .019" ± .003 Galvanized steel with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

Color Matched: .019 ± .003 Aluminum sheet coated 2 sides with paint system that is specifically formulated for exterior applications.

Available in most popular Siding and Soffit colors. Specify color code using Color Palette on page 6.

8' Length Standard. All dimensions are nominal.

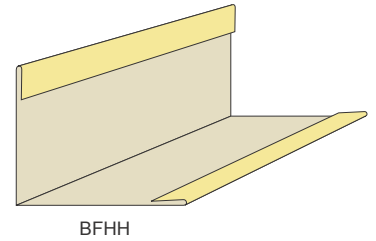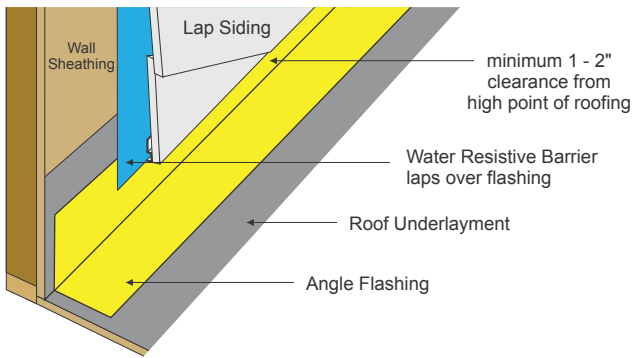

Step Flashing

DESIGN FEATURES




Multiple uses including chimney and skylight flashing. Furnished in pre-cut, user friendly pieces; no need to spend valuable time cutting 10' flashing pieces to required shorter lengths.

MATERIAL

Primed: .019" ± .003 Galvanized steel with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

Color Matched: .019 ± .003 Aluminum sheet coated 2 sides with paint system that is specifically formulated for exterior applications.

Available in most popular Siding and Soffit colors. Specify color code using Color Palette on page 6.

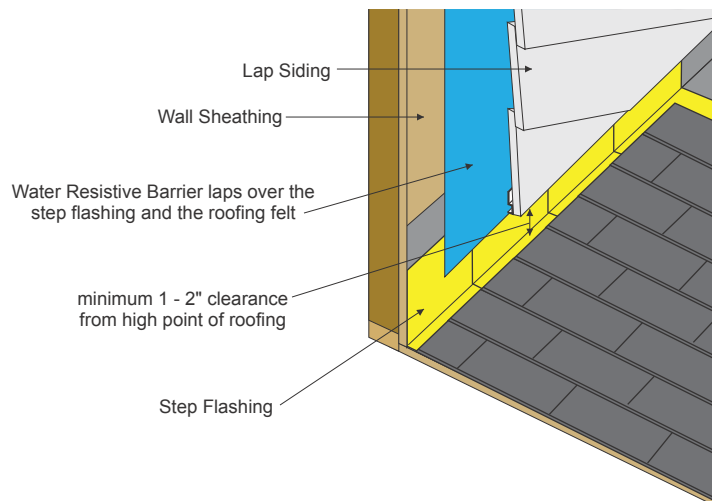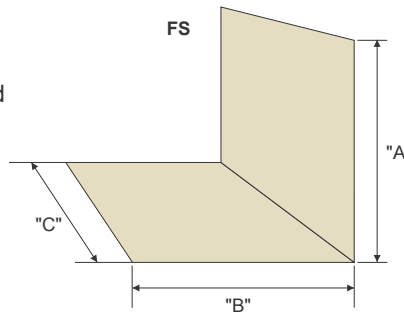

ITEM ID	"A"	"B"	"C"
FS448	4"	4"	8"
FS6612	6"	6"	12"