

# Window Flashing

## DESIGN FEATURES

Window flashing provides an easy to install and long-lasting method of stopping water penetration. Used over window trim, band boards, panel intersections, and other vertical surfaces.

## MATERIAL

**Primed:** .019" ± .003 Galvanized steel with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.


**Color Matched:** .019 ± .003 Aluminum sheet coated 2 sides with paint system that is specifically formulated for exterior applications.

Available in most popular Siding and Soffit colors. Specify color code using Color Palette on page 6.

8' Length Standard. All dimensions are nominal.

ITEM ID	"A"	"B"	"C"
VWF348	1-1/4"	3/4"	1/2"
VWF18	1-1/2"	1"	1/2"
VWF1148*	2-1/4"	1-1/4"	1/2"
VWF1128*	2"	1-1/2"	1/2"
VWF158*	1-7/8"	1-5/8"	1/2"
VWF1W	4"	1"	1/2"
VWF158W	1-7/8"	1-5/8"	1/2"

\*Also available in extruded profiles.

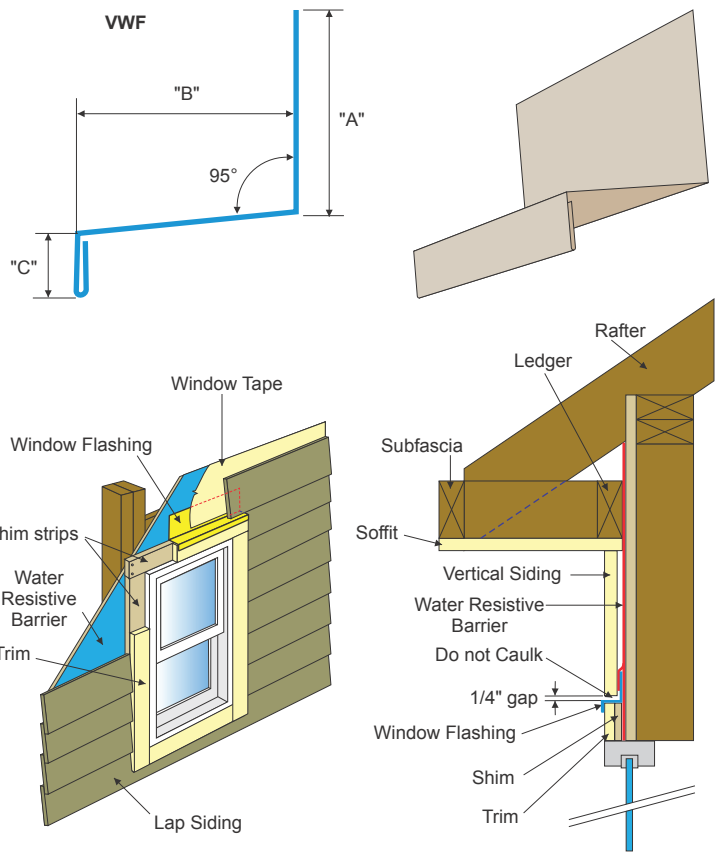

# Deck Ledger Flashing

## DESIGN FEATURES

Protects against leaks at walls to deck intersection.

## MATERIAL

**Primed:** .019" ± .003 Galvanized steel with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**Color Matched:** .019 ± .003 Aluminum sheet coated 2 sides with paint system that is specifically formulated for exterior applications.

Available in most popular Siding and Soffit colors. Specify color code using Color Palette on page 6.

8' Length Standard. All dimensions are nominal.

**WARNING:** A layer of self-stick flexible material such as asphalt or butyl tape should always be used before installing aluminum or galvanized flashing on treated lumber. This prevents a chemical reaction between the flashing and copper azole in treated lumber.

