


Soffit H-Mold (Soffit Use Only)

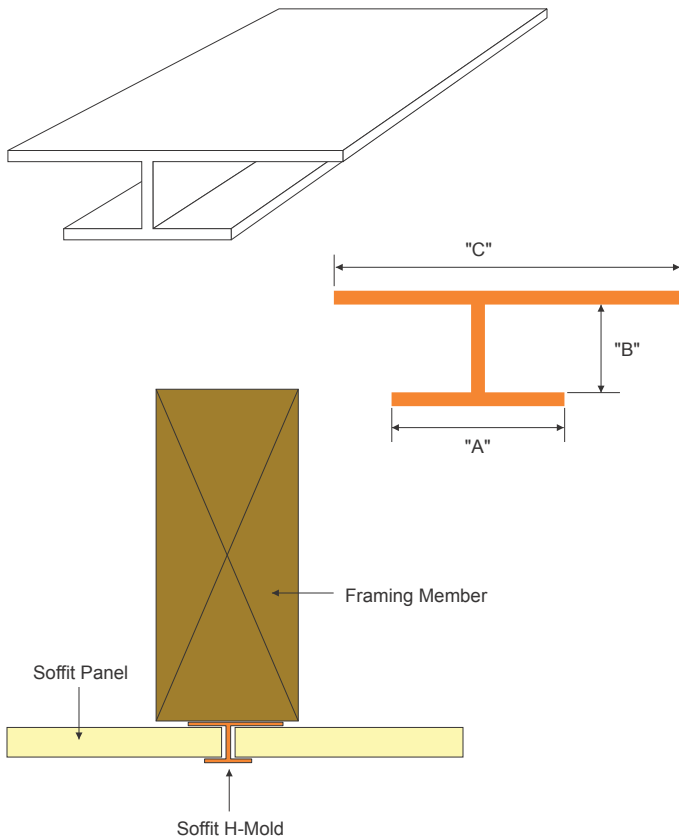


DESIGN FEATURES

Covers the end seams of the soffit material and continuous vents, providing a more appealing appearance than simply butting the vents end to end.


MATERIAL

Paintable white extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

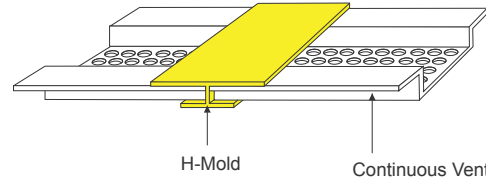

ITEM ID	"A"	"B"	"C"	LENGTH
HM148	1/2"	1/4"	1"	8'
HM1412	1/2"	1/4"	1"	12'
HM5168	1/2"	5/16"	1"	8'
HM51612	1/2"	5/16"	1"	12'
HM3812	1/2"	3/8"	1"	12'
HM71612	1/2"	7/16"	1"	12'
HM1212	1/2"	1/2"	1"	12'
HM5812	1/2"	5/8"	1"	12'

Aluminum Gable Louvers

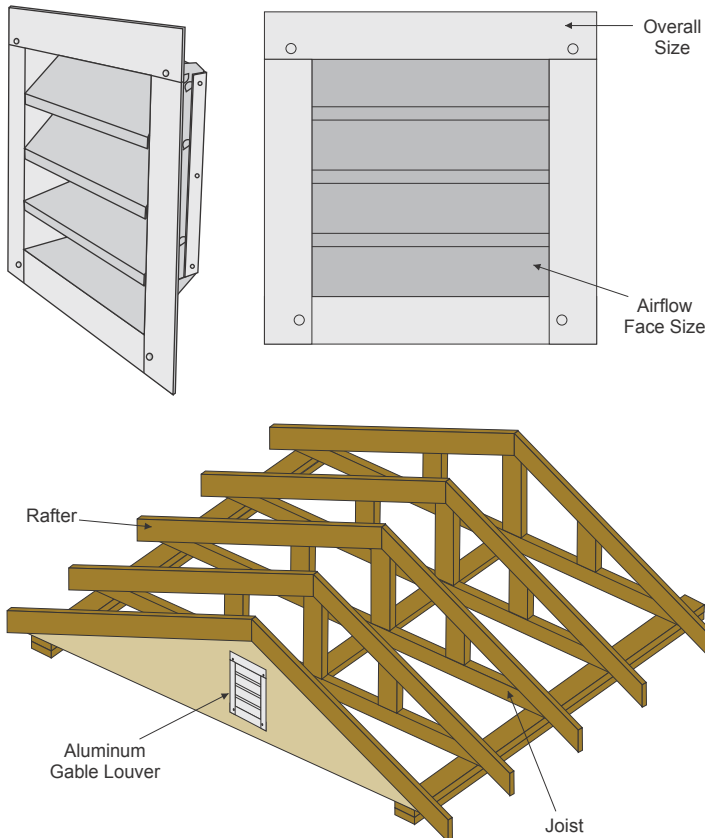

DESIGN FEATURES

Installed in the gable end of the attic. The higher they are placed, the more effective they become as exhaust vents. Wall louvers are not preferred for ventilating an attic, because they provide limited airflow under the roof deck, resulting in "hot spots." Can be used where ridge vents are impractical, or where the homeowner doesn't want roof vents.

MATERIAL

3105-type aluminum sheet with a minimum tensile strength of 29,000 psi, or equivalent, as referenced in AAMA 1482-86 (paragraph 3.2.3). The metal shall be treated on both sides with a non-chromate chemical conversion coating to ensure excellent paint adhesion and resistance to corrosion.

APPLICATION CONSIDERATIONS

Direct contact of aluminum product(s) with certain dissimilar materials or contact with the water run-off from such materials is likely to result in corrosion, which is not covered by the product warranty. Therefore, care should be exercised to avoid contact of aluminum with any corrosive materials during installation including, but not limited to: pretreated lumber, concrete, masonry cement, stucco, salt, corrosive chemicals, dissimilar metals (copper, zinc, steel, ect.).

ITEM ID	OVERALL SIZE	AIRFLOW FACE SIZE	NFA*
ASA1218	15 x 21	12 x 18	90
ASA1424	17 x 27	14 x 24	146
ASA1824	21 x 27	18 x 24	190

*NFA = net free area / sq.in. per lineal ft.