


# Aluminum Snapvent® Continuous Soffit Vent

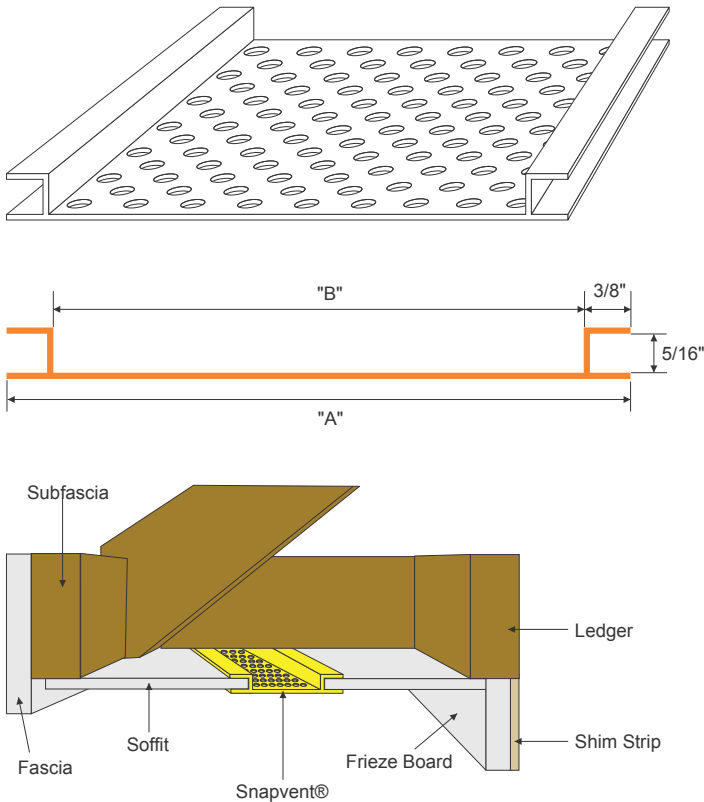

## DESIGN FEATURES

The best looking, most "framer-friendly", easy to install, effective continuous soffit vent on the market. Unique double leg channels hide edges of soffit material for clean look and help prevent vent from being pulled up into subfascia. Complies with the International Residential Code requiring that ventilation be balanced 50% exhaust / 50% intake (soffit) in all situations including continuous ridge vents. Aluminum will not burn and thus is an important element in fire resistant construction.

**4" Snapvent®** - 5/16" Snapvent® with 18.8 sq.in/foot air flow delivers almost 4x the air flow of the typical 5.0 sq.in vented soffit panel in less space while not allowing bees to enter.

## MATERIAL

6063 T-5 .050" (1.27mm) ± .005 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

## FINISH


Available in mill finish or white. Also available in popular siding/soffit colors in standard face only color match or full coverage CoastalColorCoating™ upon request.

**4" SNAPVENT®**  
US Patents #5,799,446 / #5,937,592

ITEM ID	"A"	"B"	FINISH	LENGTH	NFA*
XSV51648	5"	4-1/4"	MILL	8'	18.8
XSV51648W	5"	4-1/4"	WHITE	8'	18.8

\*NFA = net free area / sq.in. per lineal ft.

# Aluminum Ezvent® Continuous Soffit Vent

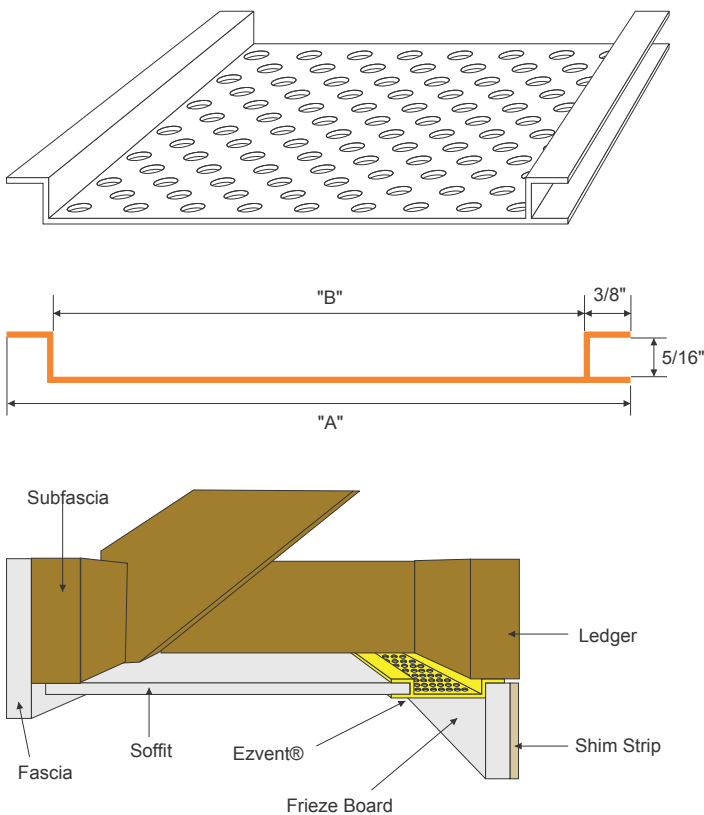

## DESIGN FEATURES

The other best looking, most "framer-friendly", easy to install, effective continuous soffit vent on the market. Unique double leg channel hide edges of soffit material for clean look and help prevent vent from being pulled up into subfascia. Aluminum will not burn and thus is an important element in fire resistant construction.

**4" Ezvent®** - 5/16" Ezvent® with 18.8 sq.in/foot air flow delivers almost 4x the air flow of the typical 5.0 sq.in vented soffit panel in less space while not allowing bees to enter.

## MATERIAL

6063 T-5 .050" (1.27mm) ± .005 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

## FINISH

Available in mill finish or white.

Also available in popular siding/soffit colors in standard face only color match or full coverage CoastalColorCoating™ upon request.

**4" EZVENT®**  
US Patents #5,881,502 / #5,937,592

ITEM ID	"A"	"B"	FINISH	LENGTH	NFA*
XEZV51648	5"	4-1/4"	MILL	8'	18.8
XEZV51648W	5"	4-1/4"	WHITE	8'	18.8

\*NFA = net free area / sq.in. per lineal ft.