

Vent Strip

DESIGN FEATURES

Starter/bottom course for both lap siding and vertical siding. Perforated holes allow any moisture build up behind the siding panels to weep out while preventing pests from entering. The venting also provides cavity ventilation which assists in drying cavity moisture and also helps increase energy efficiency due to the separation between outside heat and interior walls.


MATERIAL

Paintable white extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

WARNING: Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.

ITEM ID	"A"	"B"	"C"	RAINSCREEN SIZE
VSZ38	2"	3/8"	3/8"	3/8"
VSZ12	2"	3/8"	1/2"	1/2"
VSZ34	2"	3/8"	3/4"	3/4"

All parts are 8' Length unless otherwise indicated

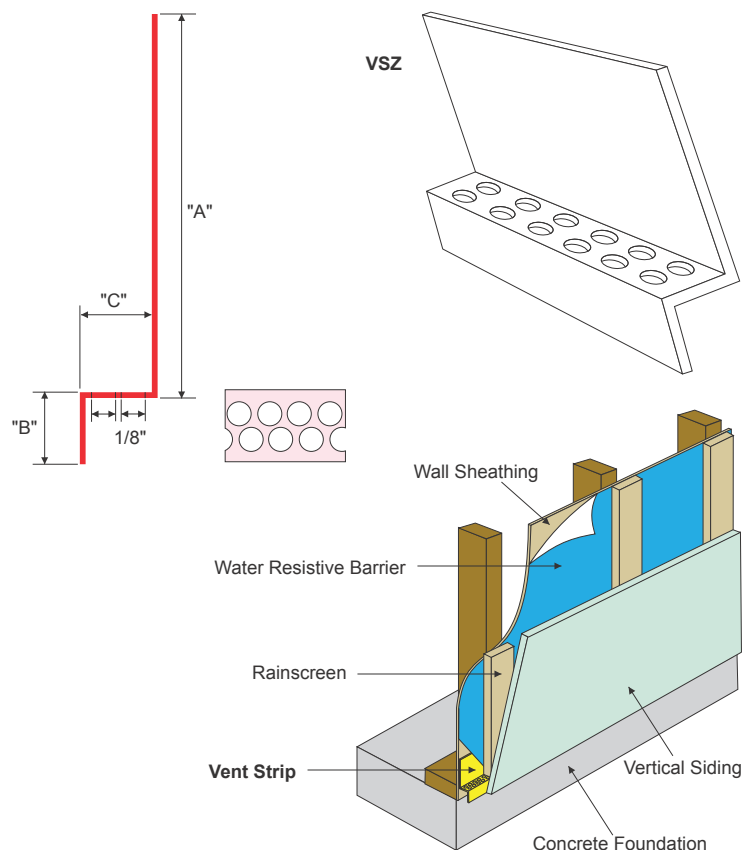

Corrugated Rainscreen

DESIGN FEATURES

An extruded pvc furring system that is 1 1/2" wide. It's flexible nature allows it to be rolled instead of being a strip, easing installation. The corrugated pattern allows for cross ventilation, and when combined with VSZ and VST it creates a vented rainscreen.

MATERIAL

Extruded rigid polypropylene, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

WARNING: Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.

ITEM ID	RAINSCREEN SIZE	LENGTH
CR38	3/8"	100'

