


XtremeFlashing™ Multi-Purpose Flashing



| ITEM ID | WIDTH | LENGTH | THICKNESS |
|------------|-------|--------|-----------|
| WS25-4 | 4" | 75' | 25 mil |
| WS25-4/100 | 4" | 100' | 25 mil |
| WS25-6 | 6" | 75' | 25 mil |
| WS25-6/100 | 6" | 100' | 25 mil |
| WS25-9 | 9" | 75' | 25 mil |
| WS25-9/100 | 9" | 100' | 25 mil |
| WS25-12 | 12" | 75' | 25 mil |
| WSB20-6 | 6" | 75' | 20 mil |
| WSB20-9 | 9" | 75' | 20 mil |
| XFB35-9 | 9" | 75' | 35 mil |



DESIGN FEATURES

XtremeFlashing™ is a self-adhering, self-sealing waterproofing tape designed for use around windows, doors, building seams and in general construction. It is composed of a white polymer film that is coated with an aggressive Broad Temperature Spectrum (BTS™) asphalt adhesive. A release liner protects the adhesive and is removed as the tape is installed.

The BTS™ adhesive self-seals around punctures such as nails and staples. This advanced system bonds to all common building and window materials and seals around fasteners to prevent damage caused by water penetration.


INTENDED USES

Install on the window sill to protect against moisture that can contribute to rot, mold and mildew. Use to seal the window flange to the building wall in new construction to prevent window leaks, seal around doors, under siding, exterior plaster, sill plates and wall joints, or in any application where the membrane is protected from long-term ultraviolet exposure.

Also available in synthetic butyl designed for any climate. Available in 6"x75' and 9"x75'.

XtremeFlex™ is designed for anytime a flexible flashing could be needed, ex. window sills, arched windows, and pipe or curved openings. Available in 9" x 74'.

Utility Moisture Flash

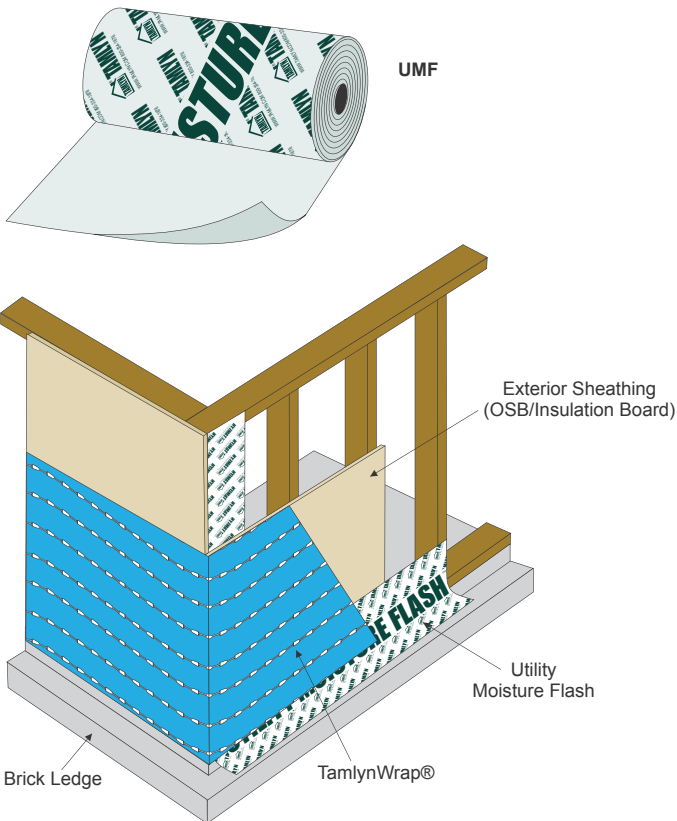

DESIGN FEATURES

Utility Moisture Flash is a heavy duty, flexible, tear resistant, woven polypropylene nail on flashing designed to prevent moisture and water from entering the wall cavity at the base of the wall and when used around windows and doors. Utility Moisture Flash is engineered to provide excellent durability when exposed to high ultraviolet rays and has the ability to withstand high winds. The cross woven design is to be mechanically fastened with staples or capped nails. **Easy to integrate with a weather-resistant barrier.**

Approved for usage per ASTM E2112-01, Installation of Exterior Windows & Doors

- Excellent Moisture Resistance - Up to 140 Hrs at 100% Humidity
- Mold & Mildew Resistant
- Wind & Tear Resistant
- UV Resistant Up to 365 days
- Fast & Flexible Installation
- Resists Cracking
- Will not De-laminate or Shrink

ROLL SIZE / PACKAGING

12" Width x 120' Length, 20 rolls per box.