


PRODUCT SHEET

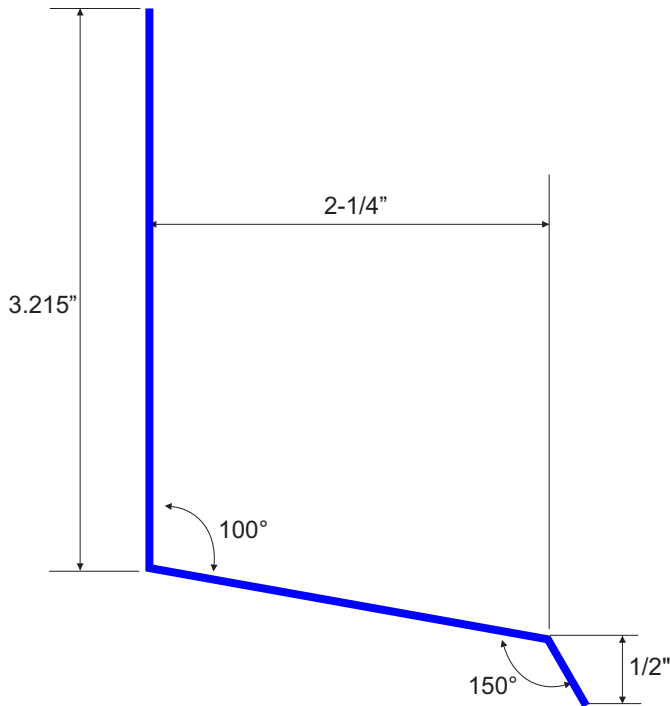

MATERIAL:

3105-type aluminum sheet with a minimum tensile strength of 29,000 psi, or equivalent, as referenced in AAMA 1482-86 (paragraph 3.2.3). The metal shall be treated on both sides with a non-chromate chemical conversion coating to ensure excellent paint adhesion and resistance to corrosion.

NOMINAL THICKNESS*: 0.040"

FINISH: Clear Anodized

SCREEN MATERIAL: Aluminum

DESIGN FEATURES: Designed to prevent siding and trim to be butted directly against mortar or masonry, including stone and brick.

*The standard thickness tolerance for products made from aluminum sheet material shall be +0.000", -0.003".



www.tamlyn.com

R.H. TAMLYN & SONS, LP
 13623 PIKE ROAD, STAFFORD TX, 77477
 TEL: 281-499-9604, FAX: 281-499-8948

Description:

Brick Ledger Flashing

Product ID:

BL

DIMENSIONS ARE IN INCHES
 UNLESS OTHERWISE SPECIFIED
 DO NOT SCALE DRAWING

Date:

10/26/15

DWG #:

BL