


# PRODUCT SHEET

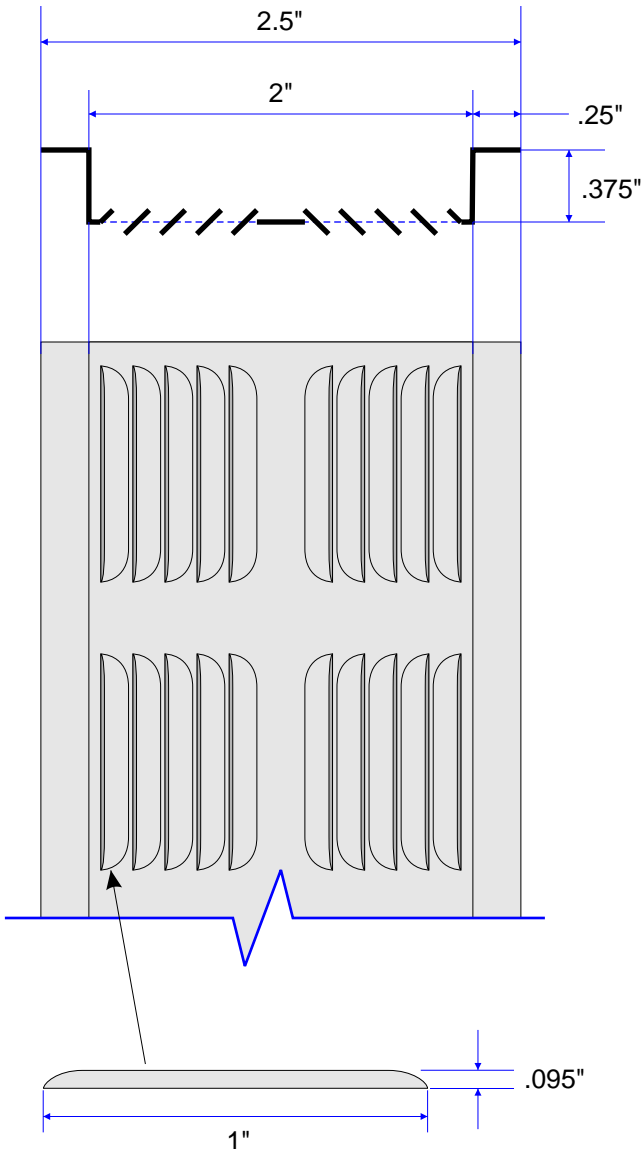

## **MATERIAL:**

3105-type aluminum sheet with a minimum tensile strength of 29,000 psi, or equivalent, as referenced in AAMA 1482-86 (paragraph 3.2.3). The metal shall be treated on both sides with a non-chromate chemical conversion coating to ensure excellent paint adhesion and resistance to corrosion.

**NET FREE AREA:** 9 sq. in. per ft.

**SIZE:** 2-1/2" x 96"

**NOMINAL THICKNESS\*:** 0.012"

**FINISH:** Mill

## **APPLICATION CONSIDERATIONS:**

Direct contact of aluminum product(s) with certain dissimilar materials or contact with the water run-off from such materials is likely to result in corrosion, which is not covered by the product warranty. Therefore, care should be exercised to avoid contact of aluminum with any corrosive materials during installation including, but not limited to: pretreated lumber, concrete, masonry cement, stucco, salt, corrosive chemicals, dissimilar metals (copper, zinc, steel, ect.).

\*The standard thickness tolerance for products made from aluminum sheet material shall be +0.000", -0.003".



www.tamlyn.com

R.H. TAMLYN & SONS, LP  
13623 PIKE ROAD, STAFFORD TX, 77477  
TEL: 281-499-9604, FAX: 281-499-8948

Description:

**Aluminum Continuous Soffit Vent**

Product ID:

**CUV8A50**

**DIMENSIONS ARE IN INCHES  
UNLESS OTHERWISE SPECIFIED  
DO NOT SCALE DRAWING**

Date:

**2/25/09**

DWG #:

**CUVA2**