


# PRODUCT SHEET

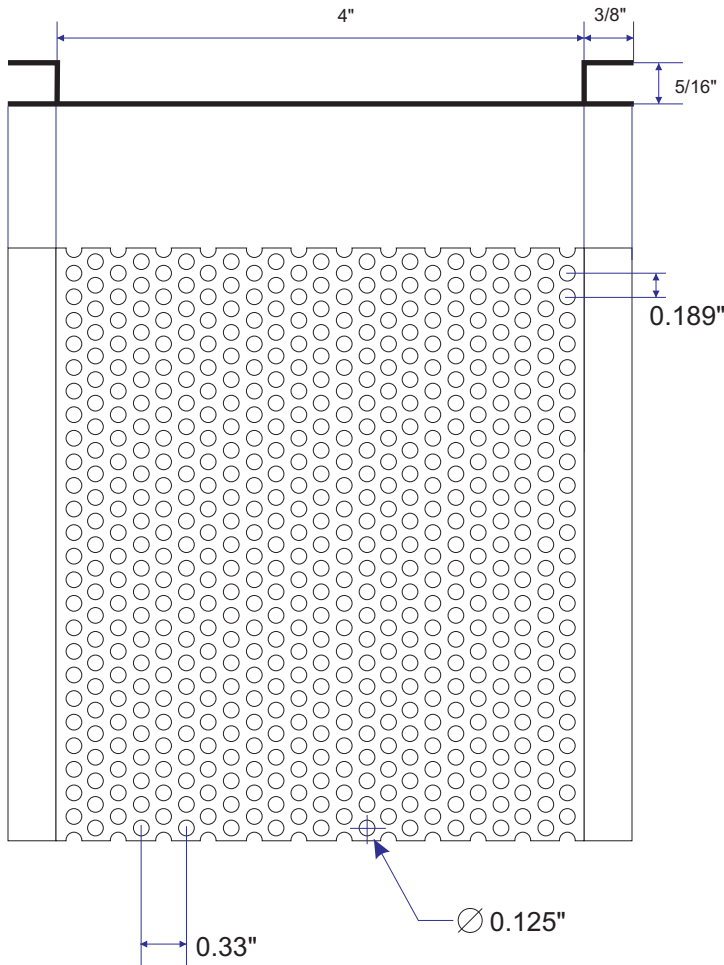

**MATERIAL:**

Extruded Rigid PVC - Polyvinyl Chloride compound, chloroethylene homopolymer compound

**NFA\*:** 18.8 sq. in. per ft.

**SIZE:** 4" x 96"

**NOMINAL THICKNESS\*:** 0.030"

**FINISH:** White

**PACK:** 20 pcs per carton

**WEIGHT:** 1 lbs/each, 20 lbs/carton

**DESIGN FEATURES:** The best looking, most "framer-friendly", easy to install, effective continuous soffit vent on the market. Unique double leg channels hide edges of soffit material for clean look and help prevent vent from being pulled up into subfascia. Complies with the International Residential Code requiring that ventilation be balanced 50% exhaust / 50% intake (soffit) in all situations including continuous ridge vents. Patents cover use of Tamlyn H Mold at seams. 1/8" holes proven to not allow insects/ bugs/bees etc to enter the attic.

**APPLICATION CONSIDERATIONS:**

Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.

\*The standard thickness tolerance for products made from aluminum sheet material shall be +0.000", -0.003".

\*NFA = net free area / sq.in. per lineal ft.



www.tamlyn.com

R.H. TAMLYN & SONS, LP  
13623 PIKE ROAD, STAFFORD TX, 77477  
TEL: 281-499-9604, FAX: 281-499-8948

Description:

**Snapvent® Continuous Soffit Vent - White**

Product ID:

**SV51648-20**

DIMENSIONS ARE IN INCHES  
UNLESS OTHERWISE SPECIFIED  
DO NOT SCALE DRAWING

Date:

**12/22/11**

DWG #:

**SV5164**