


PRODUCT SHEET

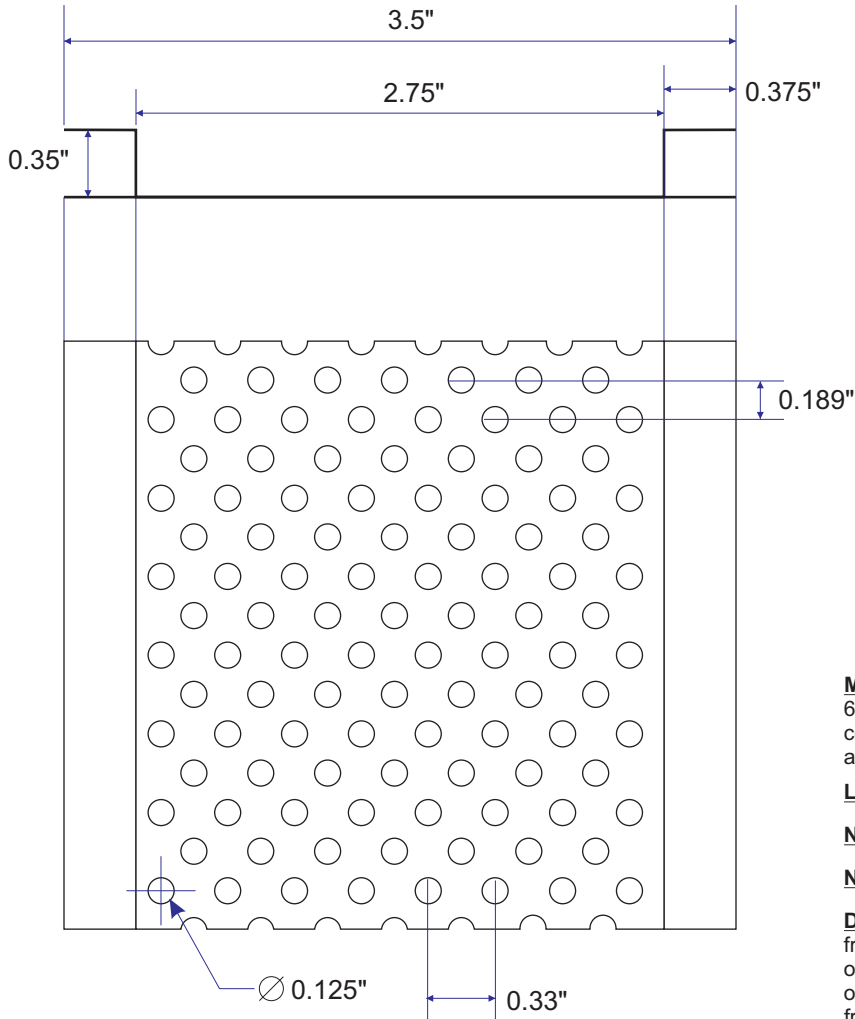

MATERIAL: Custom die-extruded from heavy-duty, 6063 T-5 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

LENGTH: 96" (10')

NOMINAL THICKNESS*: 0.050"

NFA*: 12.7 sq. in. per ft.

DESIGN FEATURES: The best looking, most "framer-friendly", easy to install, effective continuous soffit vent on the market. Unique double leg channels hide edges of soffit material for clean look and help prevent vent from being pulled up into subfascia. Complies with the International Residential Code requiring that ventilation be balanced 50% exhaust / 50% intake (soffit) in all situations including continuous ridge vents. Patents cover use of Tamlyn H Mold at seams. 1/8" holes proven to not allow insects/ bugs/bees etc to enter the attic.

*The standard thickness tolerance for products made from aluminum sheet material shall be +0.000", - 0.003".

*NFA = net free area / sq.in. per lineal ft.



www.tamlyn.com

R.H. TAMLYN & SONS, LP
13623 PIKE ROAD, STAFFORD TX, 77477
TEL: 281-499-9604, FAX: 281-499-8948

Description:

5/16" Alum. perforated Snapvent®

Product ID:

SV5168AP

*Specify the color number when ordering

**DIMENSIONS ARE IN INCHES
UNLESS OTHERWISE SPECIFIED
DO NOT SCALE DRAWING**

Date:

2/24/2012

DWG #:

SV5168AP