


PRODUCT SUBMITTAL

Adjustable Screw-On Veneer Wall Tie / Triangle Ties

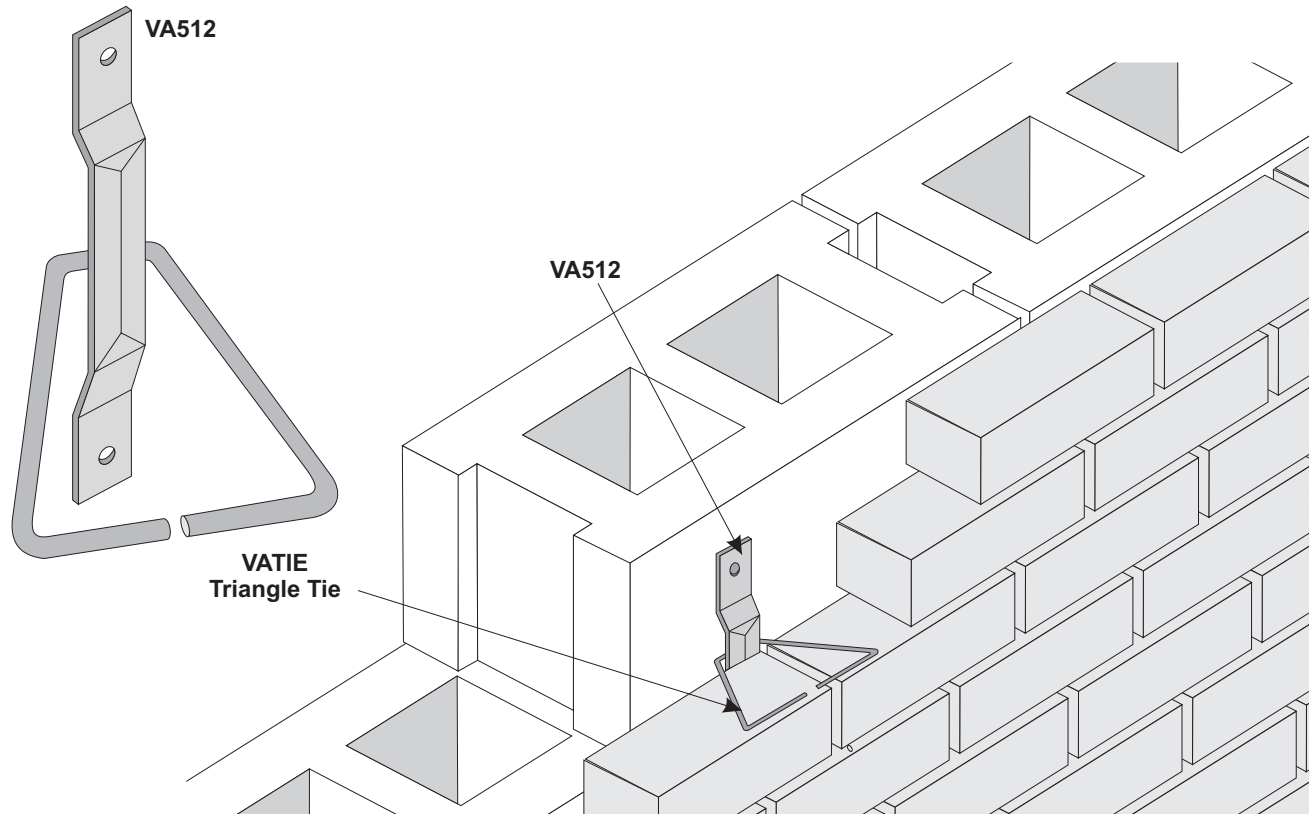

WIRE:

Cold-drawn steel wire conforming to ASTM A 82:
Tensile strength - 80,000 p.s.i.
Yield Point - 70,000 p.s.i. minimum
Zinc Coating: Hot-dip galvanized ASTM A153
Also available in hot dip galvanized after fabrication (in accordance with ASTM A153 B3) on special order

SHEET METAL:

ASTM A653
Zinc Coating: Hot-dip galvanized ASTM A153 Class B
Also available in hot dip galvanized after fabrication (in accordance with ASTM A153 B3) on special order

THICKNESS*:

VA512 - 12 Gauge

VATIE DIAMETER:

VATIE - 3/16" \varnothing Standard

LENGTH:

VA3TIE - 3", VA4TIE - 4", VA5TIE - 5", VA7TIE - 7", VA512 - 5"

FINISH:

Hot-dip galvanized

*The standard thickness tolerance for products made from aluminum sheet material shall be +0.000", -0.003".

ADJUSTABLE SCREW-ON VENEER WALL TIES:

Commercial adjustable masonry veneer anchor ties veneer to steel studs. Has reinforced deformations and 1/4" holes.

TRIANGLE TIES: Ties veneer anchor to masonry. Hot dipped available (special order with 1.50 oz zinc coating).



R.H. TAMLYN & SONS, LP
13623 Pike Road
Stafford, TX 77477
TEL: 800-334-1676, FAX: 281-499-8948