

# 2TF/CF4

## DESIGN FEATURES

Designed to provide clearance between siding products and roofs, decks, paths, steps, driveways or any other solid surfaces.

## MATERIAL - STANDARD PROFILES

**Primed:** 26GA Galvanized steel with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**STD Color:** 26GA Aluminum sheet coated 2 sides with paint system that is specifically formulated for exterior applications. Available in most popular Siding and Soffit colors.

10' Length Standard. All dimensions are nominal.



PATENTED



2TF\*



CF4



ANGLE/BASE FLASHING

# BFH/BFHH

## DESIGN FEATURES


Efficient wall to roof application. Protects against leaks at walls and chimneys to roof connections.

## MATERIAL - STANDARD PROFILES


**Primed:** 26GA Galvanized steel with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

**STD Color:** .019 ± .003 Aluminum sheet coated 2 sides with paint system that is specifically formulated for exterior applications. Available in most popular Siding and Soffit colors.



10' Length Standard. All dimensions are nominal.

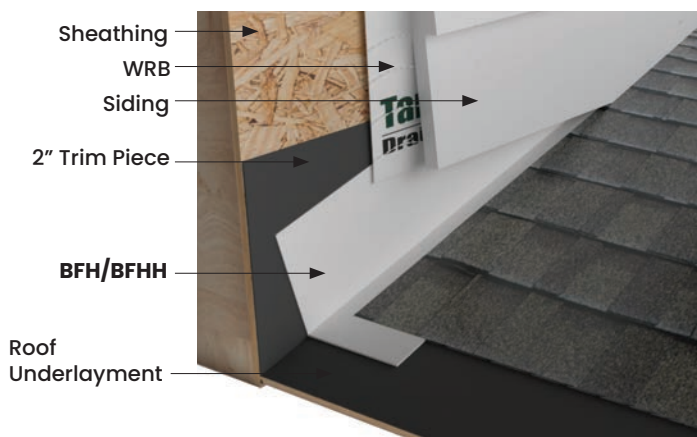

BFH



BFHH

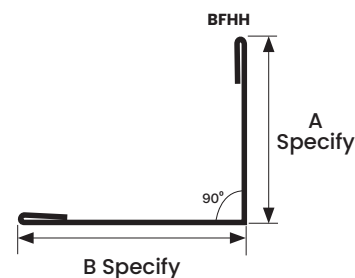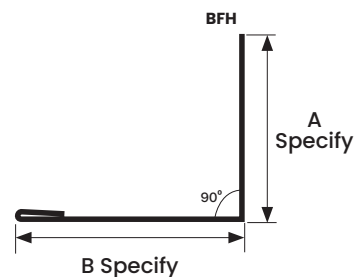

\*See conventional flashing pages for common sizes of these profiles.