VZB


DESIGN FEATURES


Z Flashing provides an easy to install and long-lasting method of stopping water penetration. Used over window trim, band boards, panel intersections, and other vertical surfaces.

MATERIAL - STANDARD PROFILES

Primed: 26GA Galvanized steel with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

STD Color: .019 ± .003 Aluminum sheet coated 2 sides with paint system that is specifically formulated for exterior applications. Available in most popular Siding and Soffit colors.

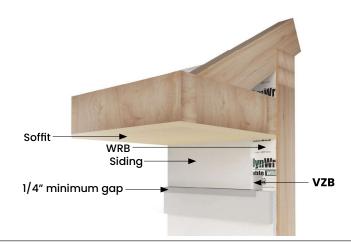



*Hem Available upon request with primed.

^{*}All standard colors with hem.

ITEM ID	A	В	С
VZB516*	1-3/16"	5/16"	1/2"
VZB516W*	4"	5/16"	1/2"
VZB38	1-1/8″	3/8″	1/2"
VZB12	1″	1/2"	1/2″
VZB58	1-3/8"	5/8″	1/2"

* Also available in extruded profiles

All parts are 8' Length standard. All dimensions are nominal.

BRICK/STONE LEDGER FLASHING

DESIGN FEATURES

Designed to prevent siding and trim being butted directly against mortar or masonry, including stone and brick.

MATERIAL - STANDARD PROFILES

Primed: 26GA .019" ± .003 Galvanized steel with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

STD Color: .019 ± .003 Aluminum sheet coated 2 sides with paint system that is specifically formulated for exterior applications. Available in most popular Siding and Soffit colors.

10' Length Standard. All dimensions are nominal.

