


XtremeInterior: Fire Rated Profiles
MCRFR - FIRE RATED C MOLD

Contact Marcus Armenta - 562.484.8752
 www.tamlyn.com

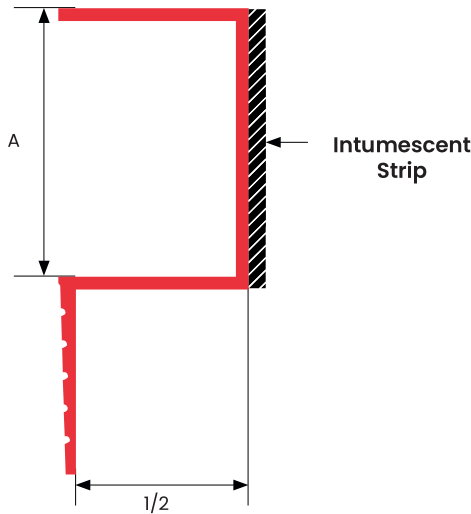

XtremeInterior by Tamlyn is proud to be the first to offer **Fire Rated Profiles** to enhance our extensive catalog of extruded aluminum trim! The addition of a factory applied intumescent strip along the back wall of the profile enables drywall designs to achieve 1 hour and 2 hour fire ratings without the requirement of an extra layer of drywall. The intumescent strip expands when exposed to increased heat during a fire and will completely seal off the gap in drywall preventing the passage of fire.


XtremeInterior Fire Rated Profiles have been 3rd party fire tested per ASTM E119, Standard Test Methods for Fire Test of Building Construction and Materials are listed under report number WFCi Report #20091.

PATENT NUMBER: 9,371,644

DESIGN FEATURES

Clean finish design with reveal detail for drywall terminations at ceilings, windows, doors and other material transitions. Can be installed horizontally or vertically. Can be used in conjunction with 5/8" drywall, panel installation and with wrapped surface finishes such as fabric or vinyl wall coverings. Ridged faces for tape & float and pre-punched holes for easy install (hole placement may vary).

Available in 10' length. 6063 T5 aluminum with standard clear anodized or primed finish. Anodized color and powder coating finishes available with custom color matching.

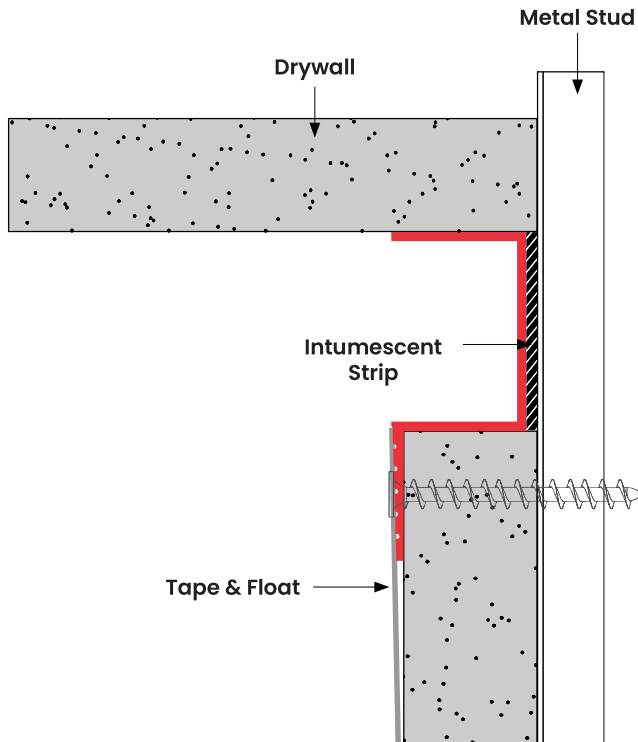

ITEM ID	A	B
MCRFR-12	1/2"	5/8"
MCRFR-58	5/8"	5/8"
MCRFR5-14	1/4"	1/2"
MCRFR5-12	1/2"	1/2"
MCRFR5-100	1"	1/2"