


PCSL

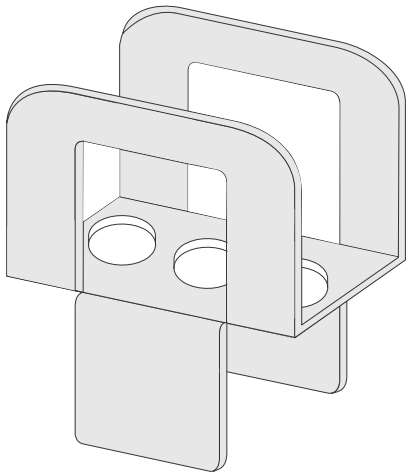

DESIGN FEATURES


For quick, easy installation between plywood panels for roof sheathing or panelized construction .. provide structural support .. reduce normal plywood deflection between panels .. embossed dimples/built-in spacer type feature provide APA recommended 1/8" gap.

MATERIAL

20 ga. galvanized steel

ITEM ID	REF.	MATERIAL	PANEL THICKNESS	Sheathing		NUMBER OF PC OR PCS PER SPAN
				With Clip	Without Clip	
PCSL716	PSCL 7/16	GALV. STEEL	7/16	24	24	1
PCSL1532	PSCL 15/32	GALV. STEEL	15/32	32	28	1
PCSL12	PSCL 1/2	GALV. STEEL	1/2	32	28	1
PCSL58	PSCL 5/8	GALV. STEEL	5/8	40	32	1
PCSL1932	PSCL 19/32	GALV. STEEL	19/32	40	32	1
PCSL34	PSCL 3/4	GALV. STEEL	3/4	48	36	2
PCSL2332		GALV. STEEL	23/32	48	36	2

PCSL Series

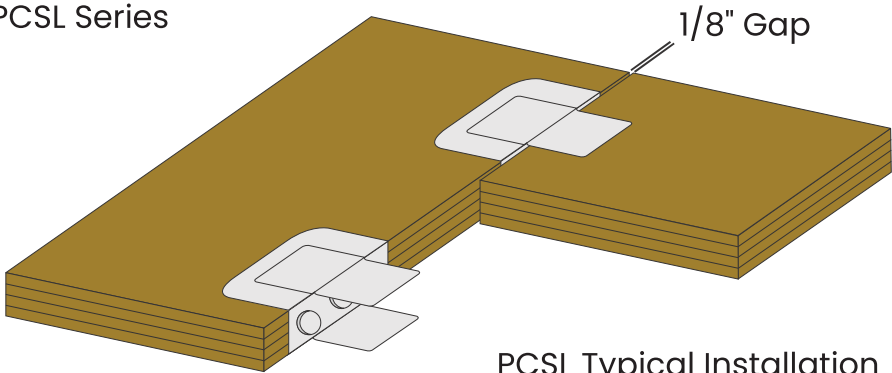

PCSL Typical Installation