
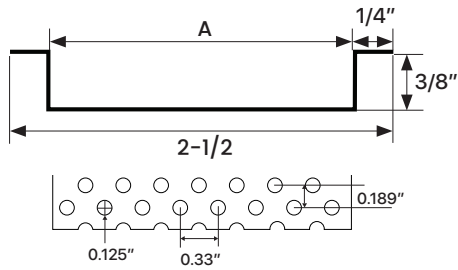


VPCA

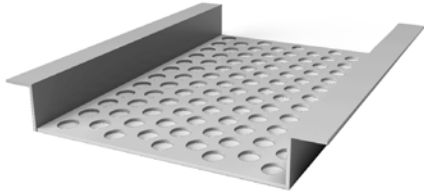

DESIGN FEATURES

Provides a continuous under soffit air flow to provide superior ventilation.

MATERIAL

3105-type aluminum sheet with a minimum tensile strength of 29,000 psi, or equivalent, as referenced in AAMA 1482-86B (paragraph 3.2.3). The metal shall be treated on both sides with a non-chromate chemical conversion coating to ensure excellent paint adhesion and resistance to corrosion.

FINISH

Stocked in mill finish, white, black and brown.

ITEM ID	A	FINISH	NFA*
VPCA2	2"	MILL	9
VPCA2-BK	2"	BLACK	9
VPCA2-BR	2"	BROWN	9
VPCA2-WH	2"	WHITE	9
VPCA4	4"	MILL	18.8
VPCA4-BK	4"	BLACK	18.8
VPCA4-BR	4"	BROWN	18.8
VPCA4-WH	4"	WHITE	18.8
VPCA6*	6"	MILL	27.8
VPCA6-BK*	6"	BLACK	27.8
VPCA6-BR*	6"	BROWN	27.8
VPCA6-WH*	6"	WHITE	27.8

*SPECIAL ORDER ITEMS

All parts are 8' length standard unless otherwise indicated

*NFA = net free area / sq.in.per linear ft.

