


TWR101

DESIGN FEATURES

5' X 50' (250SF) gap spacing is 10.1 mm. The TamlynWrap® RainScreen 10.1 is a multi-layer water management system. This product is ideal for use over various substrates such as coated OSB and behind Stucco, Fiber Cement Board, Stone and Metal Panels. The 10.1 mm (3/8") thick cavity spacers are non-compressible and can act as a furring to promote enhanced drainage and drying capacity with improved installation efficiency.

ITEM ID	TWR101
WIDTH	5 ft
LENGTH	50 ft
COVERAGE	250 sf
ROLL WEIGHT	22 lbs
THICKNESS	10.5 mm
DRAINAGE GAP	10.1 mm
UV RATING	MAXIMUM 120 days
WARRANTY	15 year limited

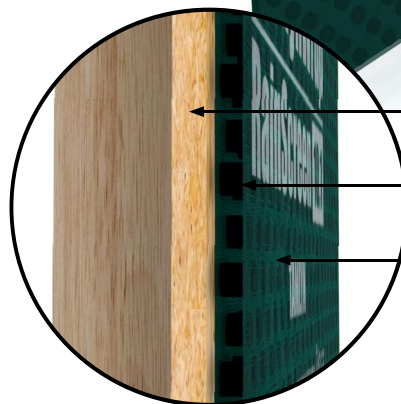


Sheathing

10.1 mm Cavity Spacer

TamlynWrap® RainScreen 10.1



When design calls for a rainscreen system, Tamlyn has a solution with our Vented Rainscreen System. Comprised of the VST (Rainscreen Top Vent), CR (Corrugated Rainscreen), and VSZ (Vent Strip); this system provides a cavity space with both vertical and cross ventilation which will enable drying and liquid water removal.

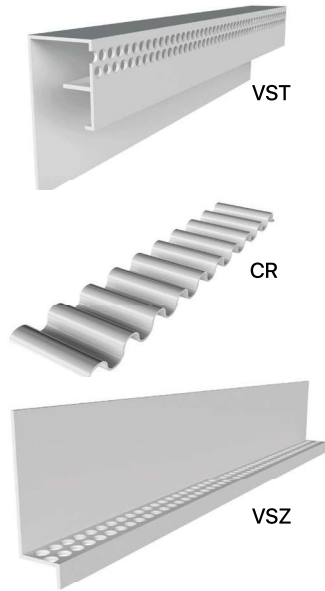

CORRUGATED RAINSCREEN

CR



DESIGN FEATURES

An extruded PVC furring system that is 1-1/2" wide. Its flexible nature allows it to be rolled instead of being a strip, easing installation. The corrugated pattern allows for cross ventilation, and when combined with VSZ and VST, it creates a vented rainscreen.

Must be used together as a system with VST and VSZ.

MATERIAL

Paintable white extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

PACKAGING

3 100' roll per Box

ITEM ID	RAINSCREEN SIZE	LENGTH
CR38	3/8"	300'

