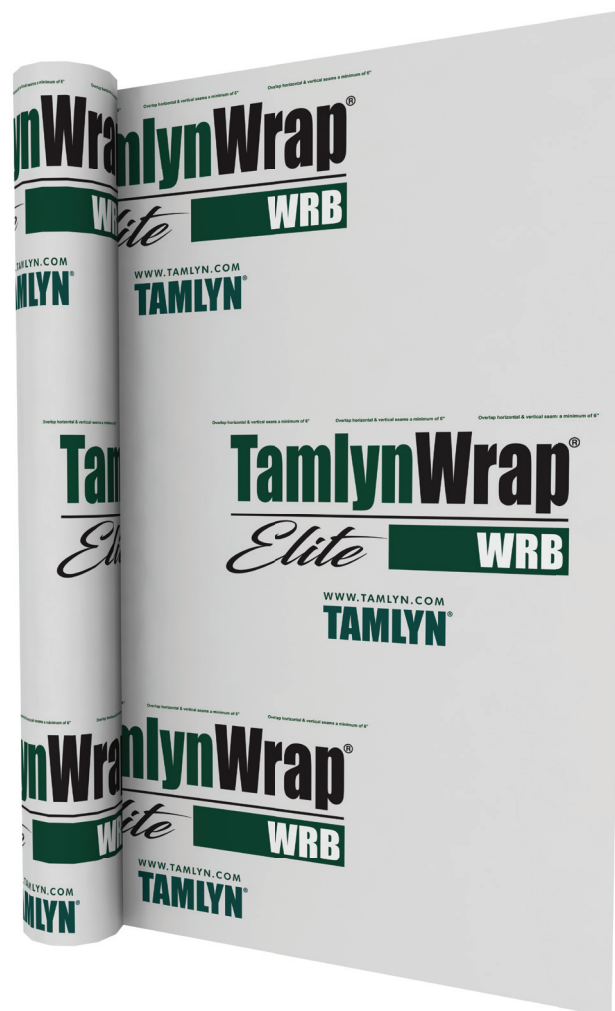


TamlynWrap[®] Elite WRB

Also sold in other countries as HOME WRB

 Tech Support / Sales: 800-334-1676
 www.tamlyn.com

PROPERTY	RESULTS	METHOD
BASIS WEIGHT	85 GM/SQM	ASTM D 5261
GRAB TENSILE STRENGTH (MD/CD)	68 lb / 52 lb	ASTMD 5034
WATER VAPOR PERMEANCE	22 PERMS	ASTM E 96 METHOD (A)
WATER PENETRATION RESISTANCE	>5 hrs @ 55 cm >180 cm	AATCC 127
WATER RESISTANCE	60 Minutes	ASTM E2556
AIR RESISTANCE	<0.004 cfm/sqft	ASTM E 2178
FIRE TESTING	CLASS A	ASTM E84 FSI / SDV NFPA 285
ULTRA VIOLET LIGHT EXPOSURE (UV)	120 DAYS	


DESIGN FEATURES

TamlynWrap[®] Elite is a residential grade moisture management product. This innovative product combines a non-woven backing with a durable coating to offer a balance of strength, moisture resistance, air infiltration protection and vapor permeability. This non-perforated Water Resistive Barrier (WRB) is an economical option providing excellent moisture protection as well as wind and tear resistance. The ideal vapor permeability facilitates drying of unwanted moisture, may be used in all climate zones and is suitable for use behind all cladding systems. **TamlynWrap[®] Elite** meets or exceeds all residential code requirements at an affordable price.

WARRANTY

Tamlyn is committed to providing great products that are durable and lasting. Tamlyn offers a 10 Year Product Warranty.

BENEFITS:

- Excellent water resistance
- Ideal UV resistance
- Available in 9' rolls
- Vapor permeable
- Air Barrier performance
- Meets and exceeds ICC AC38 WRB code requirements
- Works with various cladding materials