
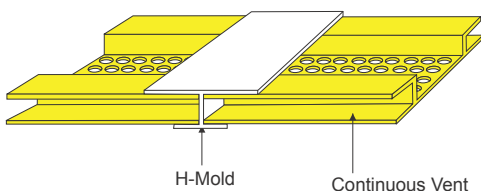
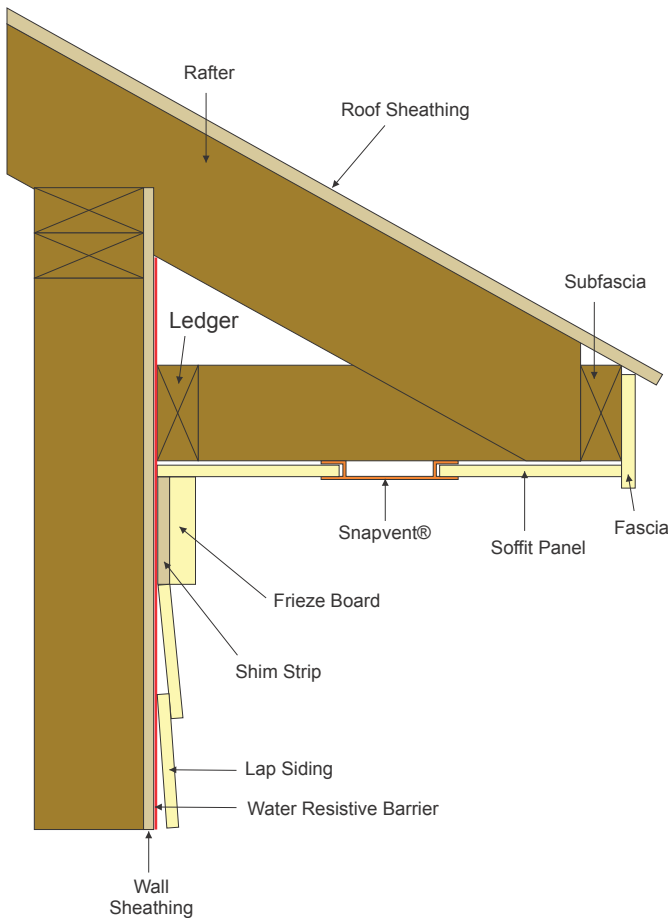
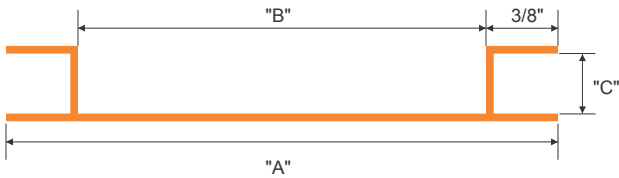


Snapvent® Continuous Soffit Vent

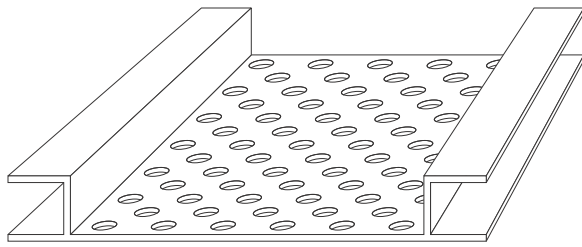

DESIGN FEATURES

The best looking, most "framer-friendly", easy to install, effective continuous soffit vent on the market. Unique double leg channels hide edges of soffit material for clean look and help prevent vent from being pulled up into subfascia. Complies with the International Residential Code requiring that ventilation be balanced 50% exhaust / 50% intake (soffit) in all situations including continuous ridge vents.

2" Snapvent® with 9 sq.in/foot air flow will typically satisfy the balance requirements for most traditional roofs and overhangs.

3" Snapvent® - 1/4", 5/16" and 5/8" Snapvent® is a must for large attic/steep pitched homes with limited soffit areas available to vent, and multifamily jobs, providing 12.7 sq.in/foot air flow (more attic ventilation = less likelihood of preventable problems such as mold, caused by excessive attic moisture), or use double vents.

4" Snapvent® - 1/4" and 5/16" Snapvent® with 18.8 sq.in/foot air flow delivers almost 4x the air flow of the typical 5.0 sq.in vented soffit panel in less space while not allowing bees to enter.

MATERIAL

Paintable white extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

2" SNAPVENT® US Patents #5,799,446 / #5,937,592

ITEM ID	"A"	"B"	"C"	LENGTH	NFA*
SV148	2-7/8"	2-1/8"	1/4"	8'	9
SV5168	2-7/8"	2-1/8"	5/16"	8'	9
SV388	2-7/8"	2-1/8"	3/8"	8'	9
SV7168	2-7/8"	2-1/8"	7/16"	8'	9
SV128	2-7/8"	2-1/8"	1/2"	8'	9
SV348	2-7/8"	2-1/8"	3/4"	8'	9

3" SNAPVENT® US Patents #5,799,446 / #5,937,592

ITEM ID	"A"	"B"	"C"	LENGTH	NFA*
SV143	3-3/4"	3"	1/4"	8'	12.7
SV51638	3-3/4"	3"	5/16"	8'	12.7
SV5838	3-3/4"	3"	5/8"	8'	12.7

4" SNAPVENT® US Patents #5,799,446 / #5,937,592

ITEM ID	"A"	"B"	"C"	LENGTH	NFA*
SV144	5"	4-1/4"	1/4"	8'	18.8
SV51648	5"	4-1/4"	5/16"	8'	18.8

*NFA = net free area / sq.in. per lineal ft.