


PRODUCT SHEET

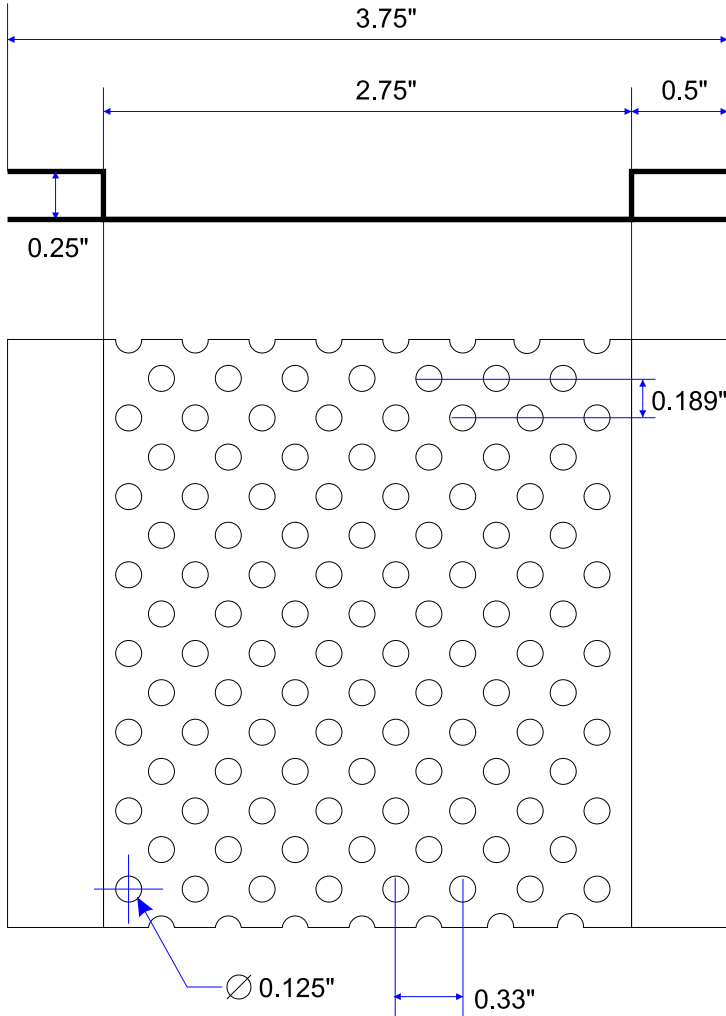

MATERIAL:

Extruded Rigid PVC - Polyvinyl Chloride compound, chloroethylene homopolymer compound

NFA*: 12.7 sq. in. per ft.

SIZE: 3" x 96"

NOMINAL THICKNESS*: 0.030"

FINISH: White

PACK: 40 pcs per carton

WEIGHT: 0.75 lbs/each, 30 lbs/carton

DESIGN FEATURES: The best looking, most "framer-friendly", easy to install, effective continuous soffit vent on the market. Unique double leg channels hide edges of soffit material for clean look and help prevent vent from being pulled up into subfascia (allowing possible rodent or other pest penetration into attic).

Complies with the International Residential Code requiring that ventilation be balanced 50% exhaust / 50% intake (soffit) in all situations including continuous ridge vents Patents cover use of Tamlyn Vinyl H Mold at seams 1/8" holes proven to not allow insects/ bugs/bees etc to enter the attic.

Wide Snapvent® - 1/4" wide Snapvent® is a must for large attic/steep pitched homes with limited soffit areas available to vent, and multifamily jobs, providing 12.7 sq.in/foot air flow.

APPLICATION CONSIDERATIONS:

Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.

*The standard thickness tolerance for products made from aluminum sheet material shall be +0.000", -0.003".

*NFA = net free area / sq.in. per lineal ft.



www.tamlyn.com

R.H. TAMLYN & SONS, LP
13623 PIKE ROAD, STAFFORD TX, 77477
TEL: 281-499-9604, FAX: 281-499-8948

Description:

Snapvent® Continuous Soffit Vent - White

Product ID:

SV143-40

DIMENSIONS ARE IN INCHES
UNLESS OTHERWISE SPECIFIED
DO NOT SCALE DRAWING

Date:

2/25/09

DWG #:

SV143