



# Product Submittal Sheet

Tech Support / Sales: 800-334-1676  
www.tamlyn.com

## XtremeTrim® Standard Horizontal Z

### 07 46 00 (SIDING ACCESSORIES)

#### DESIGN FEATURES

**XZH** - Provides clean and consistent horizontal transition between panels. Designed to work in conjunction with XtremeTrim® Vertical Reveal and Siding H-Mold.

**XZH5163** - Design affords greater reveal flexibility up to 2-1/2" while working in conjunction with XtremeTrim® Vertical Reveal and Siding H-Mold. Patented retention leg on back prevents flexing with expansion.

**XZS516W** - True size designed as an independent profiles.

#### MATERIAL



6063-T5 .050" ± .005 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

#### FINISH

Unless specified all XtremeTrim® items are provided in primed finish. Also available in popular siding/soffit colors in standard face only color match or full coverage CoastalColorCoating™. Clear Anodized is stocked and custom anodized is available (minimums apply).

#### NOTE

Do not install XtremeTrim® Horizontal Z upside down on horizontal applications where the exterior flange can catch water.

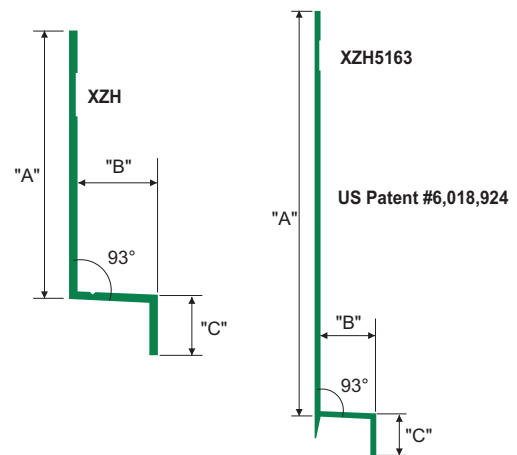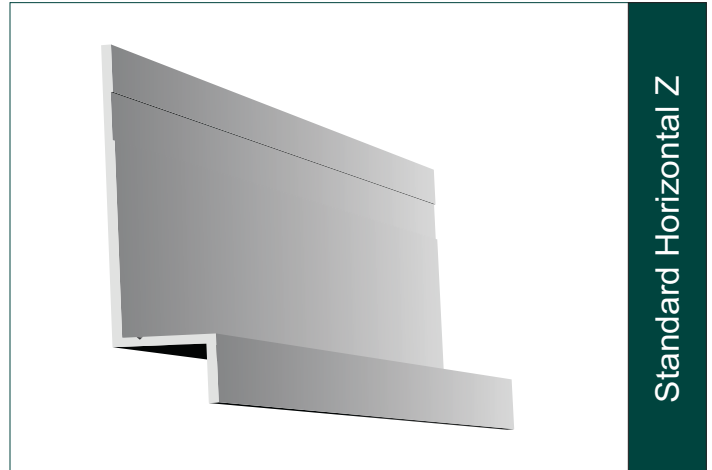

ITEM ID	"A"	"B"	"C"	SIDING SIZE
XZH516	1-1/2"	15/32"	3/8"	5/16"
XZH5163	3-1/2"	15/32"	3/8"	5/16"
XZH716	1-1/2"	5/8"	3/8"	7/16"
XZH58	1-1/2"	3/4"	1/2"	5/8"
XZS516W	1-1/2"	11/32"	3/8"	5/16"

All parts are 10' Length unless otherwise indicated

#### Green Building and LEED

Tamlyn products can earn or contribute to credits in categories MR 4.1 and MR 4.2. These credits require a minimum percentage of the value of the building materials to be recycled. Tamlyn products are typically made from 75-100% post industrial and post consumer scrap.

For more details and LEED letters contact Technical Support at 800-334-1676.

© 2017 R.H. Tamlyn & Sons, LP

Project Information	Contractor Information	Architect Information
Name:	Name:	Name:
Address:	Contact:	Contact:
	Phone:	Phone:
	Fax:	Fax: